

139,283

PATENT



SPECIFICATION

*Application Date, Feb. 17, 1919. No. 3829/19.*

*Complete Left, Apr. 7, 1919.*

*Complete Accepted, Mar. 4, 1920.*

PROVISIONAL SPECIFICATION.

Improvements in Pocket Lighters.

I, CHARLES HENRY THOMAS WALBANCKE, Harcourt House, South Eastern Road, Ramsgate, Kent, Tobacconist's Manager, do hereby declare the nature of this invention to be as follows:—

- “The improved pocket lighter” comprises a combination of four parts.
- 5 The lighter being fitted with an asbestos wick does not require replacing. The cap above is so constructed that it protects the wheel when in pocket. The bottom cup forms a pipe presser for pressing down the tobacco when lighted, or when partly burnt down.
- 10 The side pricker with knob which is three corner shape is for cleaning out the bowl of pipe, or raising up the tobacco when choked in the bowl. The spring is fixed to the screw, to avoid the spring flying out when unscrewed, which also has a top to it to prevent the flint wearing into the spring; it also keeps the flint in position.
- 15 The idea is that a smoker has everything he requires in his hand at once when lighting his pipe. It being exceptionally light in weight makes it very comfortable in the pocket.

Dated the 15th day of February, 1919.

CHARLES HENRY THOMAS WALBANCKE.

COMPLETE SPECIFICATION.

20

Improvements in Pocket Lighters.

I, CHARLES HENRY THOMAS WALBANCKE, Harcourt House, South Eastern Road, Ramsgate, Kent, Tobacconist's Manager, do hereby declare the nature of this invention and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement:—

- 25 My invention consists of an improved smokers' combination appliance, of the type comprising a pyrophoric lighter, a pricker, and means for pressing the tobacco down in the pipe bowl.
- In an appliance as heretofore made the means last mentioned have been combined with the pricker.

[Price 6d.]



According to my invention, the means for pressing down the tobacco is independent of the pricker, and forms part of a filling cap fitted over the lower end of the container, whilst the pricker, and the sheath in which it is stowed when not in use, is made three cornered.

The accompanying drawings illustrate the form of the invention. 5

Fig. 1, represents the improved lighter complete.

Fig. 2, represents the bottom cap (A);

This cap is to be used for pressing the tobacco down in the bowl of the pipe.

Fig. 3 represents a pricker (B);

This pricker is to be used for cleaning out the bowl of the pipe, or for raising 10 up the tobacco, when the tobacco is choked in the bowl.

Fig. 4, represents a sheath (C);

This sheath is for protecting the pricker (B). Fig. 3, already mentioned.

The top cap is raised a little above the wheel, and protects the wheel when 15 in the pocket.

The spring acting on the flint is fixed to the screw; this fixture prevents the spring from flying out when unscrewed.

The spring has also a top fitted to it, this top prevents the flint wearing into the spring.

The top also keeps the flint in position. 20

The lighter is exceptionally light in weight, and in shape, and is very convenient for carrying in the pocket.

Having now particularly described and ascertained the nature of my said invention and in what manner the same is to be performed, I declare that 25 what I claim is:—

A smokers' combination appliance consisting of a pyrophoric igniter, an independent three cornered pricker adapted to be stowed when not in use in a similarly shaped sheath on the side of the igniter, and means forming part of the filling cap adapted for pressing down the tobacco in a pipe bowl, substantially as herein described and shown in the accompanying drawings. 30

Dated this 9th day of January, 1920.

CHARLES HENRY THOMAS WALBANCKE.

[This Drawing is a full-size reproduction of the Original.]

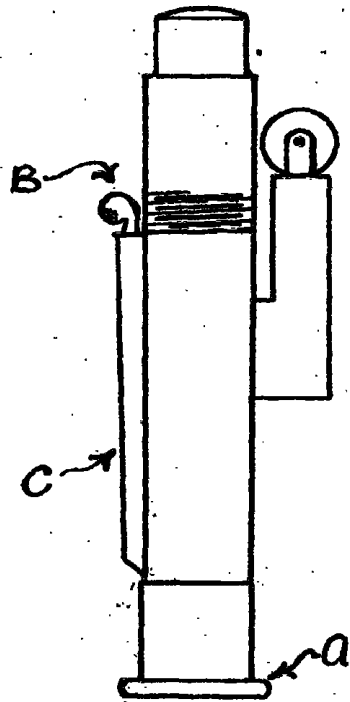


Fig 1



Fig 2



Fig 3

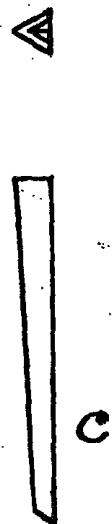


Fig 4

